

Hermann


Electrochemistry Line



- pH/ORP/ION METERS
- CONDUCTIVITY/TDS/SALINITY METERS
- DISSOLVED OXYGEN METERS
- TURBIDIMETER
- MULTIPARAMETER WATER QUALITY METERS
- LABORATORY ELECTRODES

Water Quality Meter and
Laboratory Instruments

HE-25CW-CN pH Benchtop Meter Economy Line

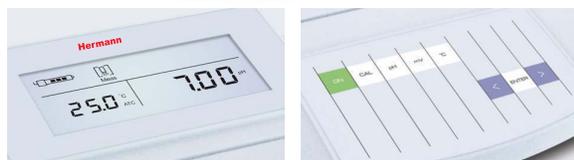

Parameters: pH - mV

Model	HE-25CW-CN
pH	
Range	0.00~14.00pH
Accuracy	±0.05pH
Resolution	0.01pH
Calibration Points	2 points
Calibration Solutions	USA (pH4.01/7.00/10.01) or NIST (pH4.01/6.86/9.18)
Temperature Compensation	0~100°C
Compensation Mode	Manual
mV	
Range	-1999~1999mV
Accuracy	±10mV
Resolution	1mV
Others	
Connector	BNC
Power Requirements	DC9V, using AC adapters, 220VAC/50Hz
Dimensions	210(L)×205(W)×65(H)mm
Weight	1.5kg

Meter Includes

pH electrode - E-201 BNC, pH buffer solutions (pH4.01/7.00/10.01) and power adapter.

El medidor incluye

Electrodo de pH E-201 BNC, solución buffer de pH (pH4.01/7.00/10.01) y adaptador de corriente.

Features

- Economy pH meter is equipped with a white backlit LCD display.
- 2 points push-button calibration with auto-buffer recognition.
- Automatic electrode slope display helps user decide whether to replace sensor.
- Automatic Temperature Compensation provides accurate reading over the entire range.

Características

- Medidor de pH equipado con pantalla LCD con retroiluminación blanca.
- 2 puntos de calibración con reconocimiento automático de buffer
- Display automático de la pendiente de electrodos. Ayuda al usuario a decidir cuándo reemplazar el sensor
- Compensación automática de temperatura que proporciona una lectura precisa en todo el rango.

Accesories

- E201-BNC pH electrode
- pH Buffer Solutions (pH4.01/7.00/10.01)
- Power Adapter

Accesorios

- Electrodo de pH E201-BNC
- Soluciones Buffer de pH
- (pH4.01/7.00/10.01)

Hermann

Water Quality Meter and
Laboratory Instruments



Distributor in Argentina



Gral. Urquiza 706 C1221ADF Bs. As. Argentina

Tel.: (54-11) 4932-3000 Fax: (54-11) 4931-6600

E-mail: instrumentalia@pemint.com

<http://www.instrumentalia.com.ar>